






HSF



RoHS

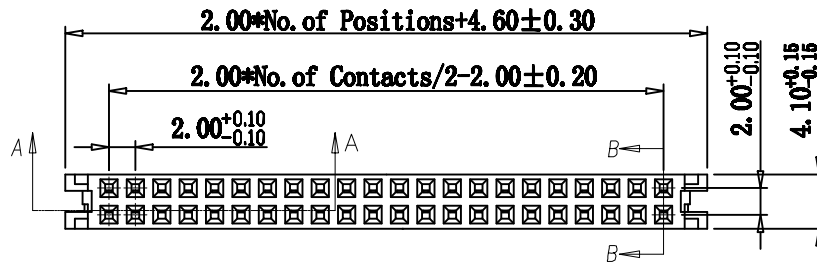

SECTION B-B

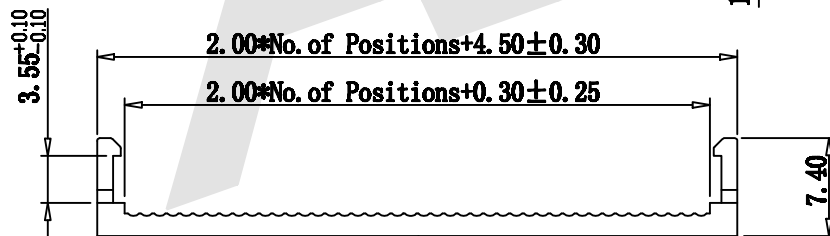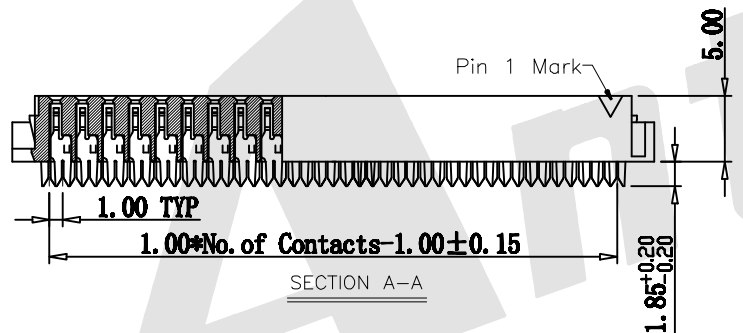

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000M Ω min
Contact Resistance:	20M Ω max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Phosphor Bronze
Contact Plating:	Au Over Ni
Insulator Material:	PBT+30%GF UL 94V-0

Ordering Code:

FCCS05 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06P 08P 10P
12P 14P 16P
18P 20P 22P
24P 26P 30P
34P 36P 40P
44P 50P 60P
64P

④ Color Insulator

B:Black

G:Grey

⑤ Packing

A:Tray

B:Bag

C:Tube

D:Tape Reel

⑥ With Strain relief or not

A: With strain relief

B: without strain relief

③ Contact Plating

G0: Gold flash S0: Gold flash/Ni

G1: 3u" Gold S1: 3u" Gold/Ni

G2: 5u" Gold S2: 5u" Gold/Ni

G3: 10u" Gold S3: 10u" Gold/Ni

G4: 15u" Gold S4: 15u" Gold/Ni

G5: 30u" Gold S5: 30u" Gold/Ni

SN: Tin

Unless Otherwise specified tolerance

X: ± 0.35 X.X: ± 0.30
X.X: ± 0.25 X.XX: ± 0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Gong Fong

DATE

08/03/2017

CHECK

BobYang

DATE

08/03/2017



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

2.00mm IDC Socket Without Bump F-Type

DRAWING NO: FCCS05-XXXXX

PRODUCT NO: FCCS05-XXXXX



3rd ANGLE PROJECTION

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8