
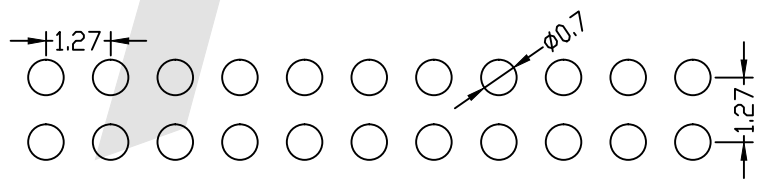
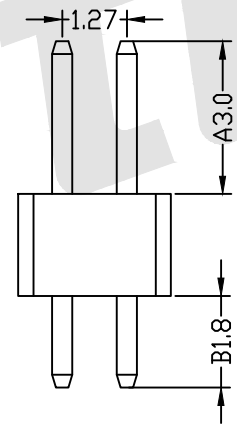
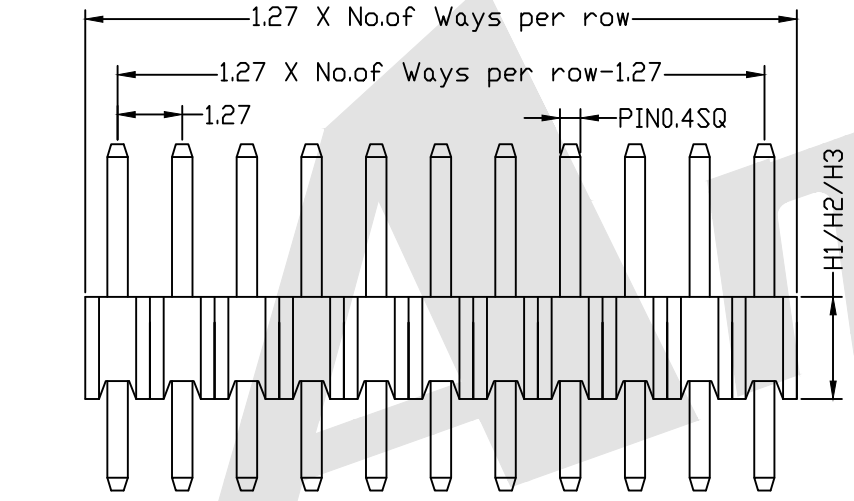


**HSF**

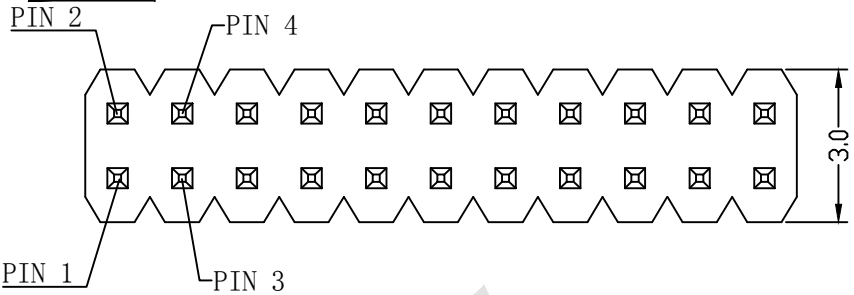

P. C. B LAYOUT

**SPECIFICATIONS:**

Current Rating: 1Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65° C to +125° C  
 Contact Material: Brass  
 Insulator Material: PA6T, UL94V-0, Black  
 Ordering Code:

PHCS06 - X - X - D - A-B - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3u" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN:Tin
- ④ Connector Type:  
 D: Dual
- ⑤ Pin Length:  
 A: 0300=3.00mm  
 B: 0180=1.80mm  
 Please mark the desired length in the A/B
- ⑥ Insulator Material:  
 B:PA6T  
 C:LCP  
 E:PA9T
- ⑦ Packing:  
 A:Tray  
 B:Bag  
 T:Tube  
 U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP
- ⑧ Plastic High:  
 H1:1.6mm  
 H2:2.0mm  
 H3:2.5mm

Standard IE P/N : PHCS06-10-G0-D-0300-0180-B-B-H2

A	B	Unless Otherwise specified tolerance	
3.0	1.8	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm
		DRAW YG ZHONG	DATE 12/07/2015
		CHECK BobYang	DATE 12/07/2015
REV	DESCRIPTION		DATE

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Straight Type Dual Row  
 DRAWING NO: PHCS06-XXD-0300-0180-XXX  
 PRODUCT NO: PHCS06-XXD-0300-0180-XXX



	Increase packing method and material		2016/10/25
REV	DESCRIPTION		DATE